

IGNITION COILS

BRIGHT SPARK.

SMART SPARK CONTROLLER

Spark intensity 30-70 milli-joule spark range is timed to optimize combustion and prevent flash inefficiency.

MICRO-MANAGER

Smart coil microprocessor with diode input which controls essential coil functions.

Continuous thermal compensation and coil regeneration are smart controlled to provide high intensity ignition sequence.

FOCUSED ON CLEAN IGNITION CYCLES

Onboard interference filtering discards erroneous measurements from electrical noise.










IGNITION COILS

READY TO FIRE.

- · Engineered to match original equipment
- Tested and validated to OE standards
- Available on TEC Doc
- 24 month warranty
- Perfect fit and hassle free installation
- · High density insulation protects coil from heat
- Moisture and vibration resistant seals



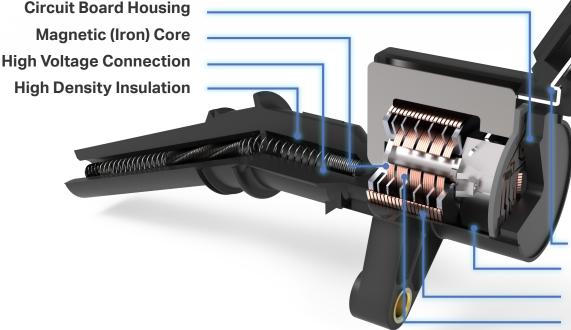

Terminal Connectors
Silicone Jacket
Primary Winding
Secondary Winding

United States

3300 Corporate Way Miramar FL 33025 Phone: 1800 877 3340

Canada

535 Millway Avenue Unit 1 Vaughan Ontario, L4K 3V4 Phone: 1800 387 2807

Mexico

Cirujanos #4, Cd. Satélite Naucalpan de Juárez, Estado de México C.P. 53100 Phone: +52 56 3370 9718 or +52 55 1384 9976

